




W4100-S

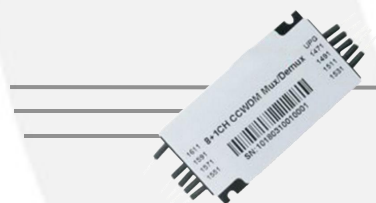

4-Channel CWDM MUX/DEMUX Module, 1270 nm-1610 nm

The WDM' W4100-S is a compact size 4-Channel CWDM MUX/DEMUX module which can achieve line monitoring. It provides low insertion loss, high channel isolation, wide pass band, high stability and reliability and epoxy free optical path. It can be used for access network, WDM network, cellular application and fiber optical amplifier.

CWDM
/DWDM

CWDM
/DWDM

FEATURES

- Low Insertion Loss
- Wide Pass Band
- High Channel Isolation
- High Stability and Reliability
- Epoxy Free Optical Path
- Compact Size

USE IN

- Line Monitoring
- WDM Network
- Telecommunication
- Cellular Application
- Fiber Optical Amplifier
- Access Network

Channel Number			4 CH
Center Wavelength			1270 nm-1610 nm
Passband			±6.5 nm min.
Ripple in Passband			0.5 dB max.
Isolation	Mux	Adjacent	30 dB min.
		Non-adjacent	45 dB min.
		Upgrade Por	15 dB min.
	Demux	Upgrade Por	30 dB min.
		Adjacent	45 dB min.
		Non-adjacent	15 dB min.
Insertion Loss (Channels)			1.5 dB max.
Polarization Dependent Loss			0.2 dB max.
Polarization Mode Dispersion			0.1 ps max.
Return Loss			50 dB min.
Directivity			55 dB min.
Power Handling			500 mW max.
Operating Temperature			-10 to +70 °C
Package Dimension			53.8x28x8.0 mm

Product	W4100-S		
Price	1 pcs	10+ pcs	100+ pcs
	\$ 190.00	\$ 161.50	\$ 95.00
Status	2-3 Weeks		