


Digital Phosphor Oscilloscope

4CH, 80-200MHz, 1GSa/S, 64M Memory Depth, Up to 400,000

wfm/s Oscilloscope, with 2CH AWG, Touch Screen, with LAN port

DPO6004C Series

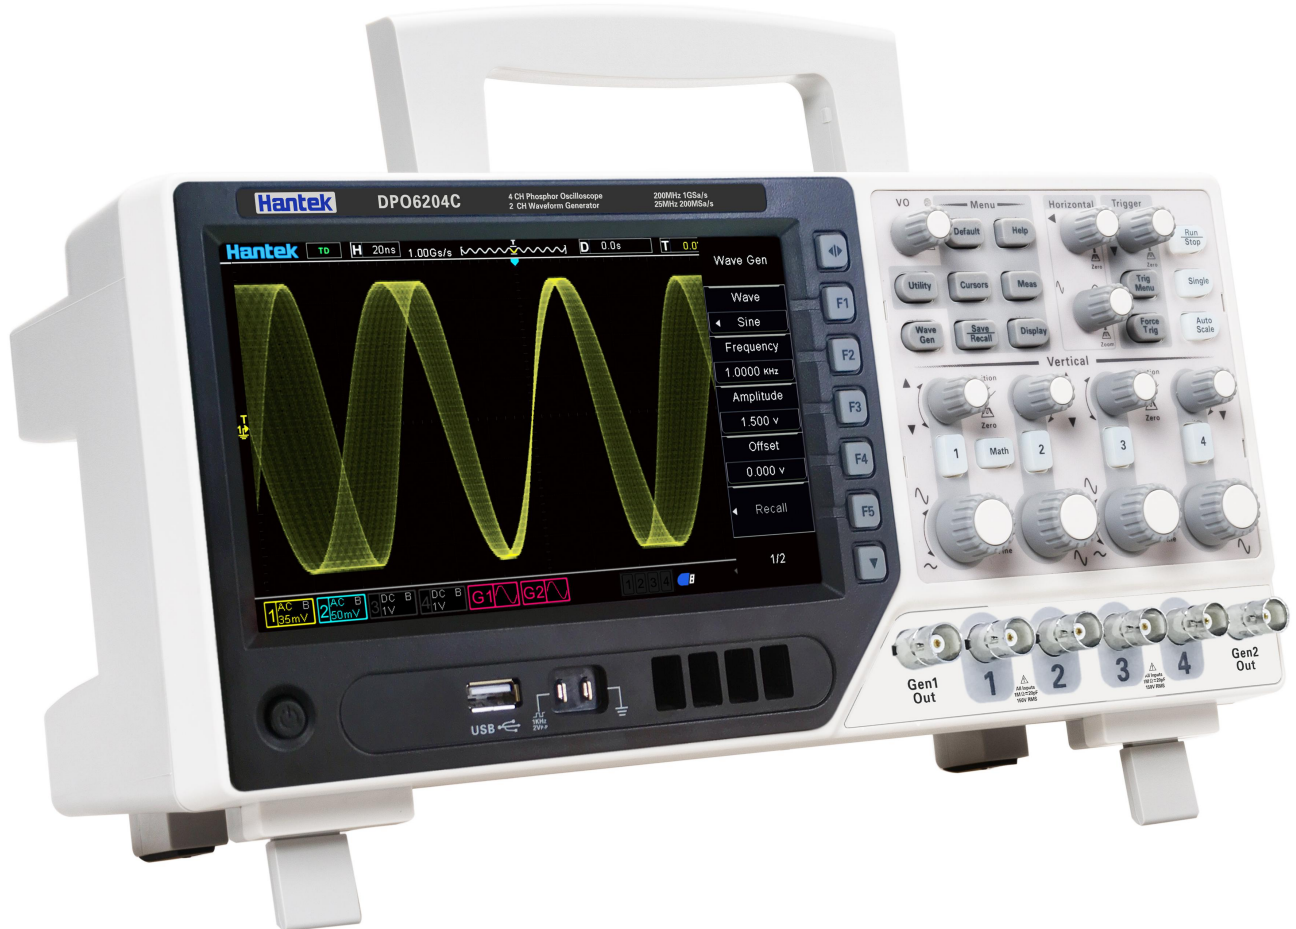

Accessories



Accessories



Features

* Oscilloscope

- 4 channels, 80-200MHz bandwidth, 1GS/s sample rate, 64 Mpts Memory Depth.
- Waveform capture rate up to 400,000 wfm/s (FastAcq Mode), 60,000 wfm/s (DPO Mode).
- Multi-segment acquisition function, maximum record waveform 80,000 frames, 256 level grayscale display.
- Low noise, vertical minimum range 500uV/div.
- Over 43 types of auto measurement function (with statistics function).
- Over 16 types of trigger function, including 5 kinds of protocol trigger, and provide 5 serial decode options, UART, LIN, CAN, SPI, IIC decode.
- 5 digit digital voltmeter and 6 digit frequency counter .
- Frequency response analyser (FRA).
- USB and LAN port, with touch screen.

* Arbitrary/Function Waveform Generator

- 2 channels, up to 25MHz frequency, 12 bits resolution, 200MSa/s sample rate.
- 13 types built-in standard waveforms, 4 groups arbitrary waveforms.

Specification

Model	DPO6204C	DPO6104C	DPO6084C
-------	----------	----------	----------

OSCILLOSCOPE MODE

Horizontal

Bandwidth	200MHz	100MHz	80MHz
Waveform Interpolation	(sin x)/x		
Record Length	Maximum 64M samples per single-channel;		
	Maximum 32M samples per dual-channel;		

	Maximum 16M samples for CH3/CH4
SEC/DIV Range	2ns/div~100s/div
	1, 2, 5 sequence
Time Base Mode	Y-T, X-Y, Roll
X-Y Number	One X-Y channel for CH1 and CH2, and one X-Y channel for CH3 and CH4
Offset from Zero Point	$\pm 0.5 \text{ div} \times \text{minimum time base voltage}$
Sample Rate and Delay Time Accuracy	$\pm 25 \text{ ppm}$
Clock Drift	$\leq \pm 5 \text{ ppm/year}$
Delta Time Measurement Accuracy (Full Bandwidth)	Single-shot, Normal mode $\pm (1 \text{ sample interval} + 100 \text{ ppm} \times \text{reading} + 0.6 \text{ ns})$
	$> 16 \text{ averages} \pm (1 \text{ sample interval} + 100 \text{ ppm} \times \text{reading} + 0.4 \text{ ns})$
	Sample interval = $s/\text{div} \div 200$

Vertical

AD Converter	8-bit resolution
VOLTS/DIV Range	500 $\mu\text{V}/\text{div}$ to 10V/div at input BNC
Position Range	500 $\mu\text{V}/\text{div}$ ~120mV/div, $\pm 1\text{V}$; 122mV/div~1.2V/div, $\pm 10\text{V}$; 1.22V/div~10V/div, $\pm 50\text{V}$
Selectable Analog Bandwidth Limit, typical	20MHz
Low Frequency Response (-3db)	$\leq 10\text{Hz}$ at BNC
Rise Time at BNC, typical	$\leq 1.7 \text{ ns}$ $\leq 3.5 \text{ ns}$ $\leq 4.4 \text{ ns}$
DC Gain Accuracy	$\pm 3\%$ for Normal or Average acquisition mode, 10V/div to 10mV/div
	$\pm 4\%$ for Normal or Average acquisition mode, 5mV/div to 500 $\mu\text{V}/\text{div}$ Note: Bandwidth reduced to 6MHz when using a 1X probe.
DC Offset Accuracy	$\pm 0.1 \text{ div} \pm 2 \text{ mV} \pm 1\% \text{ drift value}$
Isolation Ratio Among Channels	DC to max. Bandwidth: $> 40 \text{ dB}$

Acquisition

Real Time Sample Rate	1GSs/s single channel, 500MSa/s dual channel, 250MSa/s (3/4 channel) Note: when enable CH1 and CH2 or CH3 and CH4 simultaneously, equal to enable only one channel
Peak Detect	4ns
Average	After N acquisitions on all channels simultaneously, N can be set to

	2, 4, 8, 16, 32, 64, 128, 512 or 1024
High Resolution	Max. 12 bits
Minimum Pulse Width	8ns
Memory Depth	Maximum 64M samples per single-channel; Maximum 32M samples per dual-channel; Maximum 16M samples for CH3 and CH4

Inputs

Channel	4CH
Input Coupling	DC, AC or GND
Input Impedance, DC coupled	25pF±3 pF, 1MΩ±2%
Overvoltage Category	300V CAT II
Maximum Input Voltage	300V _{RMS} (10X)

Trigger

Trigger Level Range	±5 div from the center of the screen
Mode	Auto, Normal, Single
Level	CH1~CH4 ±4 divisions from center of screen
Holdoff Range	8ns ~ 10s
Trigger Level Accuracy	0.2div × volts/div within ±4 divisions from center of screen

Edge Trigger

Slope	Rising, Falling, Rising or Falling
Source	CH1~CH4

Pulse Width

Polarity	Positive, Negative
Condition(When)	<, >, ≠, =
Source	CH1~CH4
Width Range	8ns ~ 10s

Video Trigger

Signal Standard	NTSC, PAL
Source	CH1~CH4
Sync	ScanLine, LinrNum, OddField, EvenField and AllField

Slope Trigger

Slope	Rising, Falling
-------	-----------------

Condition(When)	<, >, ≠, =
Source	CH1 ~ CH4
Time Range	8ns ~ 10s

Overtime Trigger

Source	CH1~CH4
Polarity	Positive, Negative
Time Range	8ns ~ 10s

Window Trigger

Source	CH1~CH4
--------	---------

Pattern Trigger

Pattern	0: Lower level; 1: High level; X: Ignore
Level	CH1~CH4

Interval Trigger

Slope	Rising, Falling
Condition(When)	<, >, ≠, =
Source	CH1~CH4
Time Range	8ns ~ 10s

Delay Trigger

Slope	Rising, Falling
Condition(When)	<, >, ≠, =
Source	CH1~CH4
Time Range	8ns ~ 10s

Setup & Hold Trigger

Slope	Rising, Falling
Condition(When)	<, >, ≠, =
Source	CH1~CH4
Time Range	8ns ~ 10s

Under Amp

Polarity	Positive, Negative
Condition(When)	<, >, ≠, =
Source	CH1~CH4
Time Range	8ns ~ 10s

UART Trigger

Condition(When)	Start, Stop, Data, Parity Error, COM Error
Source(RX/TX)	CH1~CH4
Data format	Hex (hexadecimal notation)
Condition(When)	<, >, ≠, =
Data Length	1 byte
Data Length	5 bit, 6 bit, 7 bit, 8 bit
Parity Check	None, Odd, Even
Idle Level	High, Low
Baud Rate(Selectable)	110/300/600/1200/2400/4800/9600/14400/19200/38400/57600/115200/230400/380400/460400 bit/s
Baud Rate (Custom)	300bit/s~334000bit/s

LIN Trigger

Condition(When)	Interval Field, Sync Field, Id field, Sync Id Error, Identifier, Id and Data
Source	CH1~CH4
Data format	Hex (hexadecimal notation)
Baud Rate (Selectable)	110/300/600/1200/2400/4800/9600/14400/19200/38400/57600/115200/230400/380400/460400 bit/s
Baud Rate (Custom)	300bit/s~334000bit/s

CAN Trigger

Condition(When)	Start Bit, Remote Frame, Data Frame Id, Frame Id, Data Frame Id A, Error Frame, All Error, Ack Error, Overload Fram
Source	CH1~CH4
Data format	Hex (hexadecimal notation)
Baud Rate (Selectable)	10000, 20000, 33300, 500000, 62500, 83300, 100000, 125000, 250000, 500000, 800000, 1000000
Baud Rate (Custom)	5kbit/s~1Mbit/s

SPI Trigger

Source	CH1~CH4
Data format	Hex (hexadecimal notation)
Data Length	4, 8, 16, 24, 32

IIC Trigger

Source (SDA/SCL)	CH1~CH4
Data format	Hex (hexadecimal notation)
Data Index	0~7
When(Condition)	Start, Stop, No Ack, Address, Data, Restart

Measurements

Cursors	Voltage difference between cursors: ΔV	
	Time difference between cursors: ΔT	
	Reciprocal of ΔT in Hertz ($1/\Delta T$)	
Automatic Measurements	Frequency, Period, VMean, VMax, VMin, Pk-Pk, VTop, VMid, VBase, VAmp, VRms, Vovr, Vpre, PVRms, PVMean, RiseT, FallT, PosPW, NegPW, PDuty, NDuty, FRR, FFF, Vfov, Vrpr, BWidth, FRF, FFT, LRR, LRF, LFR, LFF, MaxTime, MinTime, +PhaseTime, -PhaseTime, Variance, +PulseCnt, -PulseCnt, +EdgeCnt, -EdgeCnt, TriggerCnt, CHN_LRR	
DVM	Source	CH1, CH2, CH3, CH4
	Measurement Type	DC RMS
		AC RMS
		DC
	Frequency Counter	Hardware 6 digit frequency counter

ARBITRARY FUNCTION WAVEFORM GENERATOR MODE

Channel	2	
Sample Rate	200MSa/s	
Vertical Resolution	12 bits	
Max. Frequency	25 MHz	
Standard Waveforms	Sine, Square, Pulse, Ramp, Noise, DC, Sinc, Exponential, Half-distorted, Lorentz, Dual-Tone Multi-Frequency, Gauss, ECG	
Arbitrary Waveforms	Arb 1, Arb 2, Arb 3, Arb 4	
Sine	0.1Hz~25MHz	
Pluse /Square	0.1Hz~10MHz	
Ramp/Sample/Half-distorted/Lorentz/Dual-Tone/ Gauss/ECG	0.1Hz~1MHz	
Exponential	0.1Hz~5MHz	
Arb.	0.1Hz~10MHz	
Waveform Length	8KSa	
Frequency	Accuracy	100 ppm (<10 kHz) 50 ppm (>10 kHz)
	Resolution	0.1Hz or 4 digit, take the larger of the two
Amplitude Output Range	10mV~7Vp-p (High Impedance) 5mV~3.5Vp-p (50Ω)	
DC Offset	Range	±3.5 V Hight Impedance
	Resolution	±1.75 V 50Ω
	Accuracy	2% (1kHz)
Outupt Impedance	50Ω	

General Specifications

Display

Screen Type	7 inch TFT (diagonal liquid crystal) touch screen
Display Resolution	800 horizontal by 480 vertical pixels
Color Display	16000K color (24bit real color)
Persistence	Min., 1 s, 5 s, 10 s, 30S, infinite
Display Type	Dot, Vector
Display Mode	Color temperature, gray scale
Display Brightness	Adjustable
Grid Type	Optional
Grid Brightness	Adjustable

Interface

Standard Interface	USB Host, USB Device, LAN
--------------------	---------------------------

Probe Compensator Output

Output Voltage, typical	About 2Vpp into $\geq 1\text{M}\Omega$ load
Frequency, typical	1kHz

Power Supply

Supply Voltage	100-120VACRMS($\pm 10\%$), 45Hz to 440Hz, CAT II 120-240VACRMS($\pm 10\%$), 45Hz to 66Hz, CAT II
Power Consumption	<30W
Fuse	T, 3.15A, 250V, 5x20mm

Environmental

Operating Temperature	0~50 °C (32~122 °F)
Storage Temperature	-40~+71 °C (-40~159.8 °F)
Humidity	$\leq +104^{\circ}\text{F}$ ($\leq +40^{\circ}\text{C}$): $\leq 90\%$ relative humidity $106^{\circ}\text{F} \sim 122^{\circ}\text{F}$ ($+41^{\circ}\text{C} \sim 50^{\circ}\text{C}$): $\leq 60\%$ relative humidity
Cooling Method	Convection
Altitude	Operating and Nonoperating 3,000m (10,000 feet)
	Random Vibration 0.31g _{RMS} from 50Hz to 500Hz, 10 minutes on each axis
	Nonoperating 2.46g _{RMS} from 5Hz to 500Hz 10 minutes on each axis
Mechanical Shock	Operating 50g, 11ms, half sine

Mechanical

Dimension	318 x 110 x 150mm (L x W x H)
Weight	2900g